



Made in the
United States of America



The 770006 Heel Grounder delivers cost-effective compliance for high-volume foot grounder use. It consists of a re-positionable, two-layer sole with a 18-inch multi-strand ribbon, which helps increase its durability.

Features

- Heel cup for use with standard shoes
- Dual cup is designed with 2 sides that can be used on the heel of the shoe
- Two layer rubber composite sole material
- Conductive exterior meets required limits of ANSI/ESD S20.20 tested per ESD TR53
- 18" conductive ribbon
- One megohm current limiting resistor
- Sole Color: (Outer) Black / (Inner) Varies

Specifications	Typical Value	Test Method
Hook and Loop	3/4"	
Sole Interior	Non-marking	
Sole Exterior	< 1 x 10 ⁶ ohms	
Total Grounder	< 1 x 10 ⁶ ohms	ESD-SP9.2, ESD TR53


Item	Description
770006	Heel Grounder w/ Dual Cup, Rubber, 18" Conductive Ribbon

NOTE: This product is not recommended for use on equipment with operating voltage exceeding 250 VAC.

CAUTION: The ESD Series is for electrostatic control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the ESD Series.

Re-positionable Sole for
Extended Performance

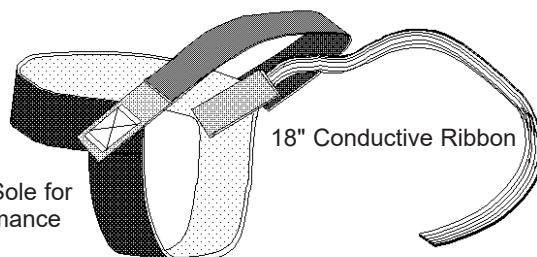

2-layer Rubber Sole
(Inner Color Varies)

Unless otherwise noted, tolerance $\pm 10\%$

Specifications and procedures subject to change without notice.

HEEL GROUNDER W/ DUAL CUP, RUBBER, 18" CONDUCTIVE RIBBON

DRAWING
NUMBER
770006

DATE
February
2018

SCS

1.888.610.7664



www.calcert.com

sales@calcert.com