

Introducing the new

CX-30

MOISTURE METER FOR COTTON



The next generation of moisture meters is here, with the introduction of the **Navigator™** Series and **EDGE™** app from Delmhorst.

NEW CX-30

Delmhorst Instrument Co introduces the new model **CX-30** cotton moisture meter. A high-quality moisture meter during harvest and ginning is an essential tool for measuring moisture content with confidence. Ensure a quality crop every time. The meter features the **EDGE™** app, to expand meter functionality and enabling users to save unlimited readings and share data from any location.

Product Features

- Large, custom display with auto backlight - easy to read under all conditions
- Modern case design with large, tactile buttons and E-Z grip handle
- On-screen statistics for up to 100 readings saved to the meter - High, Low, Average, Standard Deviation
- Measuring Ranges:
 - Lint cotton (4%-18%)
 - Seed cotton (6%-20%)
 - Wool (12%-30%)
 - Viscose/Rayon (6%-25%)
- Temperature correction (°F / °C)
- Bluetooth® connectivity
- Color-coded LED's - adjustable through **EDGE™** app
- Alarm set point – alerts to user-selected MC level
- Internal calibration check
- "Low Batt" warning with audio
- Auto off timer. Set to 1m, 4m or 10m
- Compatible with any Delmhorst electrode


Meter Specifications

- Power: 2x AA Alkaline batteries
- Op Temp: 0-255° F (-18-124°C)
- QR code on meter for easy access to support materials and meter registration
- Size: meter only - 8.03in x 2.85in x 1.60in (20.40cm x 7.24cm x 4.06cm)
- Weight: meter only - 7.7oz (218gm)
- Hard plastic carrying case included
- 2-year warranty on manufacturer's defects. Bonus warranty with on-line registration

The Delmhorst **EDGE™** app offers:


- Timestamp and geotag
- Data export to .csv format
- Save unlimited readings
- Customized LED ranges

CX-30 Electrodes

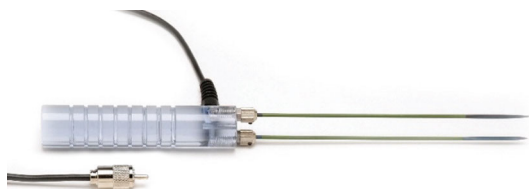

30-E/C electrode

Used for bales - 9 1/2" insulated pins, with 8 1/4" penetration, eliminates the effect of surface moisture

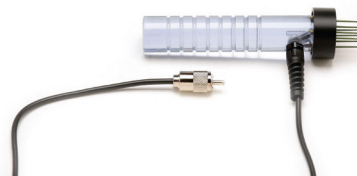

37-E/C electrode

Used for yarn, 1 1/2" pins with 1" penetration



52-E/C cup

Used for lint or seed cotton



830-T/C T-handle

Used for modules, heavy duty steel, 36"