

Truflo® — OBS Series

Pressure Gauge & Integral Guard

ICON™ Corrosion-Free
PROCESS CONTROLS Instrumentation Equipment

- ✓ All Plastic One Piece Design
- ✓ Factory Pre-Filled — No Filling
- ✓ One-Piece Molded Design — No Assembly
- ✓ Completely Corrosion Resistant

truflo®

Features

- ✓ Industry's Most Accurate | $\pm 1.5\%$
- ✓ PVC | PP | PVDF
- ✓ PTFE Teflon® Bonded Diaphragm
- ✓ Large 2 ½" Dial
- ✓ Dual Scale | psi | bar

Cutting-Edge One-Piece Plastic Pressure Gauges for Corrosive Environments

The OBS Series is the industry's only integral molded one-piece plastic pressure gauge and gauge guard. Gauge guards are utilized to protect the pressure gauge from any corrosive media in the process system via an isolator.

OBS Pressure Gauges are a one-piece design and come factory pre-filled, resulting in an industry leading accuracy of 1.5%. Eliminating the need for filling saves the user time and the difficulty of having to fill a gauge isolator. The 3 movable red, yellow and green range tabs are designed to act as a visual pressure alert for bag or filter change-outs.

The OBS Series is available in PVC, PP & PVDF, all equipped with a Teflon® Diaphragm, making the entire unit completely corrosion resistant and the perfect pressure gauge for chemical applications.

Engineering the entire body in a plastic housing rather than just the gauge guard allows users to be confident that the complete unit will stand up in even the most corrosive environments.

Pressure Range Markers

- ✓ Notification for Filter | Strainer Change Out
 - ✓ Easily Customizable to your Process Conditions
 - ✓ Eliminates Manual Marking on Gauge
- Red | Yellow | Green** - Markers

Factory Pre-Filled

- ✓ Reduces Installation Time
- ✓ Increases Accuracy
- ✓ Eliminates the Mess of Self Filling
- ✓ No Air Bubbles

PVC

PP


PVDF

PTFE



www.calcort.com

sales@calcort.com

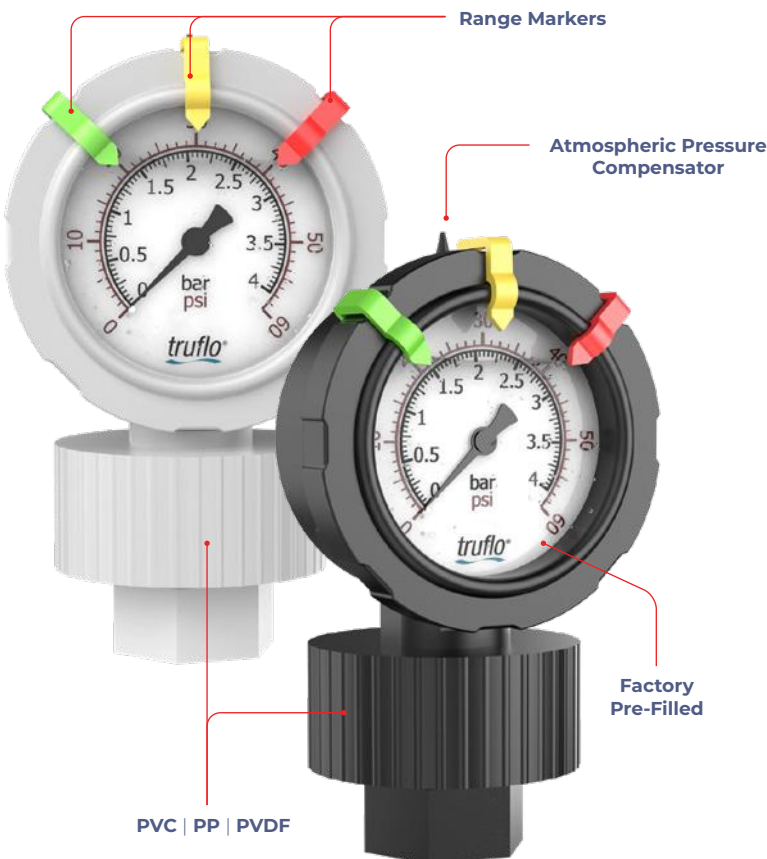

Integral Molded Gauge | Gauge Guard

- ✓ Convuluted Teflon® Diaphragm for Higher Sensitivity
- ✓ Increased Accuracy Compared to 2 Piece Gauge + Gauge Guard
- ✓ Highly Corrosion Resistant
- ✓ Suitable for Chemical Applications



1.888.610.7664

Truflo® — OBS Series

Pressure Gauge & Integral Guard


Specifications

truflo®

Mounting	Center Mount Back Connection
Process Connection	1/2" MNPT FNPT G Threaded Flanged
Measuring Principle	Bourdon Tube 316SS
Pressure Ranges psi	0-15 0-30 0-60 0-100 0-160 0-200
Lens	High Impact Polycarbonate
Filling	Glycerin Silicon* Halocarbon*
Accuracy	± 1.5%
Operating Temperature	PVC - 140°F PP - 190°F PVDF - 240°F
Dial Diameter	2 1/2"
Standards & Approvals	CE FCC RoHS Compliant

Installation Instructions

- Do not tighten by grasping the case of the gauge as this may cause damage. Always Pressure Test Connections for Leaks with Water Prior to Use on Chemical Service.
- Before installing the OBS-B Series pressure gauge, ensure attention is given to the Process Liquid, Chemical Compatibility, Temperature, Vibration, Pressure Spikes, and other climatic and application conditions that may adversely affect the performance.
- The user shall ensure that the correct gauge pressure range and the correct materials of construction are selected.

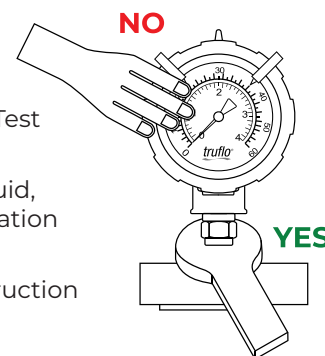

Temperature | Pressure Graphs | Non Wetted

Note: The pressure/temperature graphs are specifically for the Truflo® Pressure Gauges, during system design the specifications of all components must be considered.

Model Selection

OBS — Gauge + Guard Combo		
Size	Part Number	Material
1/2"	OBS-P-0-X	PVC
1/2"	OBS-PP-0-X	PP
1/2"	OBS-PF-0-X	PVDF

X = Max Pressure

15 ▶ 0 - 15 Psi 100 ▶ 0 - 100 Psi
30 ▶ 0 - 30 Psi 160 ▶ 0 - 160 Psi
60 ▶ 0 - 60 Psi 200 ▶ 0 - 200 Psi

1/2" FNPT is standard

Add Suffix -

'M' - Male 1/2" NPT

'F' - Flanged

'S' - 1/2" Socket

Consult Factory for Flanged Pricing | Alternative Pressure Ratings

