


RFP Series

RotaFlo® Variable Area Flow Meter

- ✓ Quick Visual Flow Indication
- ✓ Dual Scale
- ✓ Easy Installation
- ✓ NPT Connections
- ✓ SS Flow Components
- ✓ ½" - 2" Size Range

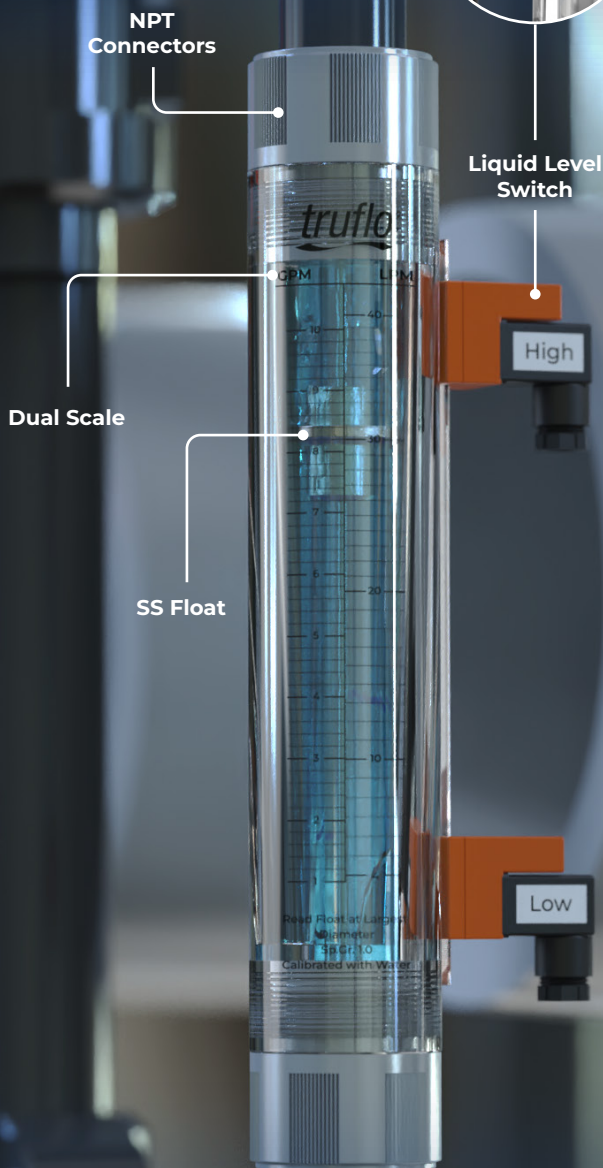

The **RFP RotaFlo®** Series flow meter provides exceptional accuracy and long term local indication of measured liquid media.

The RotaFlo® comprises a SS guide rod and a dual scale for clear visibility. The large tapered float provides stability and consistent flow indication throughout the entire range.


Technical Specifications

Plastic Wetted Material	Acrylic FPM PVC
Metal Wetted Material	SS
Accuracy	±4 F.S.
Scale	GPM LPM
Connection	NPT
Standards & Approvals	CE FCC RoHS Compliant

Technical Parameters

Model	Measure Range		End Connector	Accuracy	Size (mm)		
	GPM	LPM			A	B	C
RFP-15011	0.1 ~ 1	0.4 ~ 4	½" FNPT	±4%	233	180	Φ32
RFP-15022	0.2 ~ 2	1 ~ 7					
RFP-15033	0.3 ~ 3	1 ~ 11					
RFP-15055	0.5 ~ 5	1.8 ~ 18					
RFP-20110	1 ~ 10	4 ~ 40	¾" FNPT	±4%	283	236	Φ45
RFP-20220	2 ~ 20	10 ~ 70					
RFP-20535	5 ~ 35	20 ~ 140					
RFP-25110	1 ~ 10	4 ~ 40	1" FNPT	±4%	297	235	Φ51
RFP-25220	2 ~ 20	10 ~ 70					
RFP-25330	3 ~ 30	10 ~ 110					
RFP-25535	5 ~ 35	20 ~ 140					
RFP-25550	5 ~ 50	25 ~ 190					
RFP-40440	4 ~ 40	15 ~ 150	1½" FNPT	±4%	302	240	Φ65
RFP-40660	6 ~ 60	22 ~ 220					
RFP-4015100	15 ~ 100	50 ~ 400					
RFP-5020100	20 ~ 100	100 ~ 350	2" FNPT	±4%	367	294	Φ75
RFP-5040100	40 ~ 150	150 ~ 550					
RFP-5060200	60 ~ 200	150 ~ 750					

Dimensions

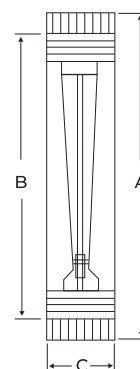

Precision and Clarity
For Reliable, Long-Term
Liquid Monitoring

